

CONTROL KEYBOARD

DCK-255



**3 AXIS
LCD DISPLAY**


Features

- Power, Pan/Tilt, Zoom, Focus , AUX Remote Control
- Maximum up to 255 Units CCTV receiver and camera control
- Automatic Back-Up Function: Keyboard Original Set up Mode
- Connect with up to 8 units Sub Keyboard
- Connect with Matrix, PC, ARU, AIU
- Control up to 32 Units Monitor


Picture



Dimensions

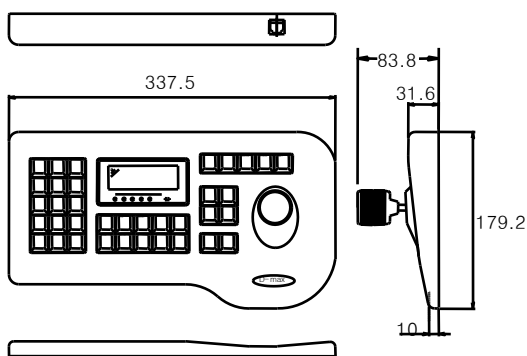

KEYBOARD

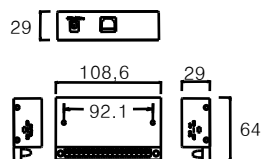

JUNCTION BOX

Specifications

MODEL	DCK-255
Control	Pan/Tilt , Zoom , Power , Auto Pan AUX Control x 2 , Preset
Connecting unit	CCTV Receiver (DRX-502A/500) PTZ DOME CAMERA
Commnication system	RS-485 (422)
Communication speed	RS485 – 9600bps , N , 8 , 1
Connector	Modular cable connection with junction box Power supplied via junction box
Package	Junction Box , 5M cable
Operating distance	Shielded twisted pair cable: Up to 1.2km
Power supply	DC12V, 1A
Power Consumption	6W
Operating temperature	0°C ~ +40°C
Weight	About 1.2Kg
Dimensions	337.5(W) x 83.8 (H) x 179.2 (D)mm