

HD-SDI Box Camera

Full HD

DMC-20FC

Picture




Feature

- 1/3" PS-Panasonic CMOS
- Full HD 2.2 Megapixel (1080p) Display
- Max. Transmission distance (200m) via coaxial cable(ECX-5C-2V)
- Low up to 0.001Lux with DSS, DC Auto Iris Lens support
- Motion Detection, Privacy Masking, Day/Night, Digital Zoom
- Noise Reduction
- SMPTE 292M(HD-SDI)
- RS-485 support



Dimensions

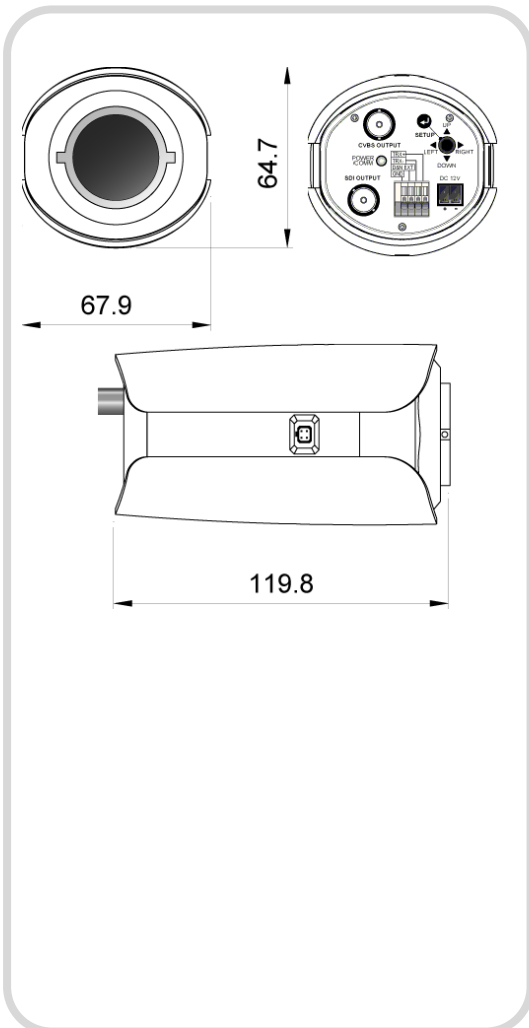

Specifications

| Items | DMC-20FC |
|-------------------------|--|
| Image sensor | 1/3" 2.2 Mega Panasonic CMOS |
| Scan mode | Progressive Scan |
| Number of active pixels | 1944(H) x 1092 (V) |
| Total number of pixels | 2010(H) x 1108 (V), 2,2M |
| Min. illumination | 0.001Lux with Sense-up |
| Luminance S/N ratio | More than 50dB (AGC Off) |
| Video Output | SMPTE292M(HD-SDI), Composite(Sub-Monitoring) |
| Day & Night | Color / Auto / BW / EXT, TDN(Optional) |
| Back Light | Off / WDR / BLC |
| Gain Control | 0 ~ 20 steps |
| White Balance | Auto / Preset / Manual |
| Noise Reduction | Off / Low / Middle / High |
| E. Zoom | X1 ~ x32 |
| Brightness | 0 ~ 20 steps |
| Mirror | Off / H / V / H&V |
| Privacy Zone | 32 Zones |
| Motion | On/ Off |
| OSD | Available |
| ACE | Off / On |
| Remote Control | RS-485 |
| Transmission Distance | 200m (ECX5C-2V) |
| Lens / Mount | DC, Manual / C, CS |
| Operating temp. | - 10° C to 50° |
| Weight | About 500g |
| Dimension | 119.8(L)X 67.9(W)X64.7(H)mm |
| Power Supply | DC12V±10 Dual Type(Optional) |
| Power Consumption | 4W (Max) |